

LAMELO

LAMELO



LAMELO



SPC/LVT FLOORING



LAMELO



LLW-02



LAMELO



LLW-01

LAMELO



LLW-04



LLW-05

LAMELO



LLW-06



LLW-07



LAMELO



LLW-08



LLW-09

LAMELO



LLW-10



LLW-11

LAMELO

LLW-13



LLW-12

LAMELO



LLW-14




LLW-15

LAMELO




LAMELO



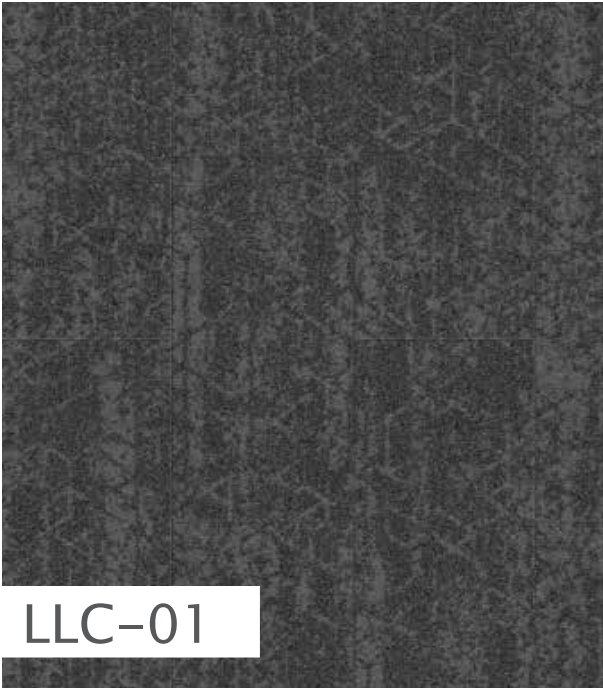


LLC-01

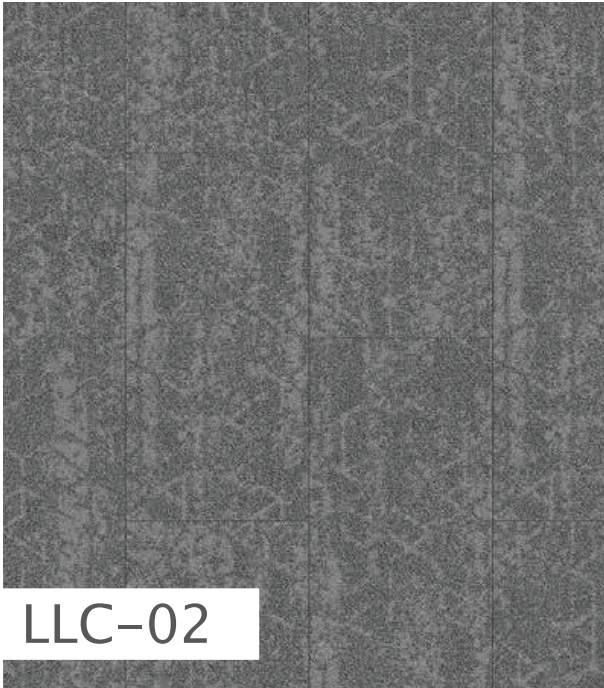

LLC-02




LLC-03

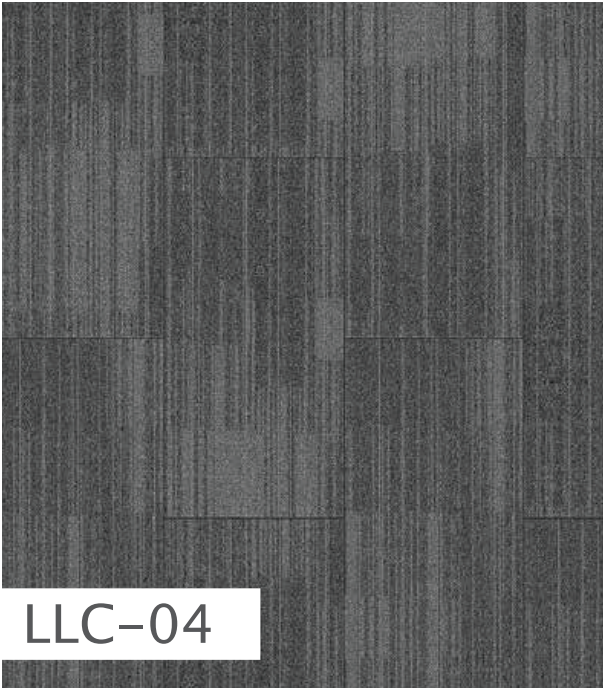


LLC-04


LAMELO

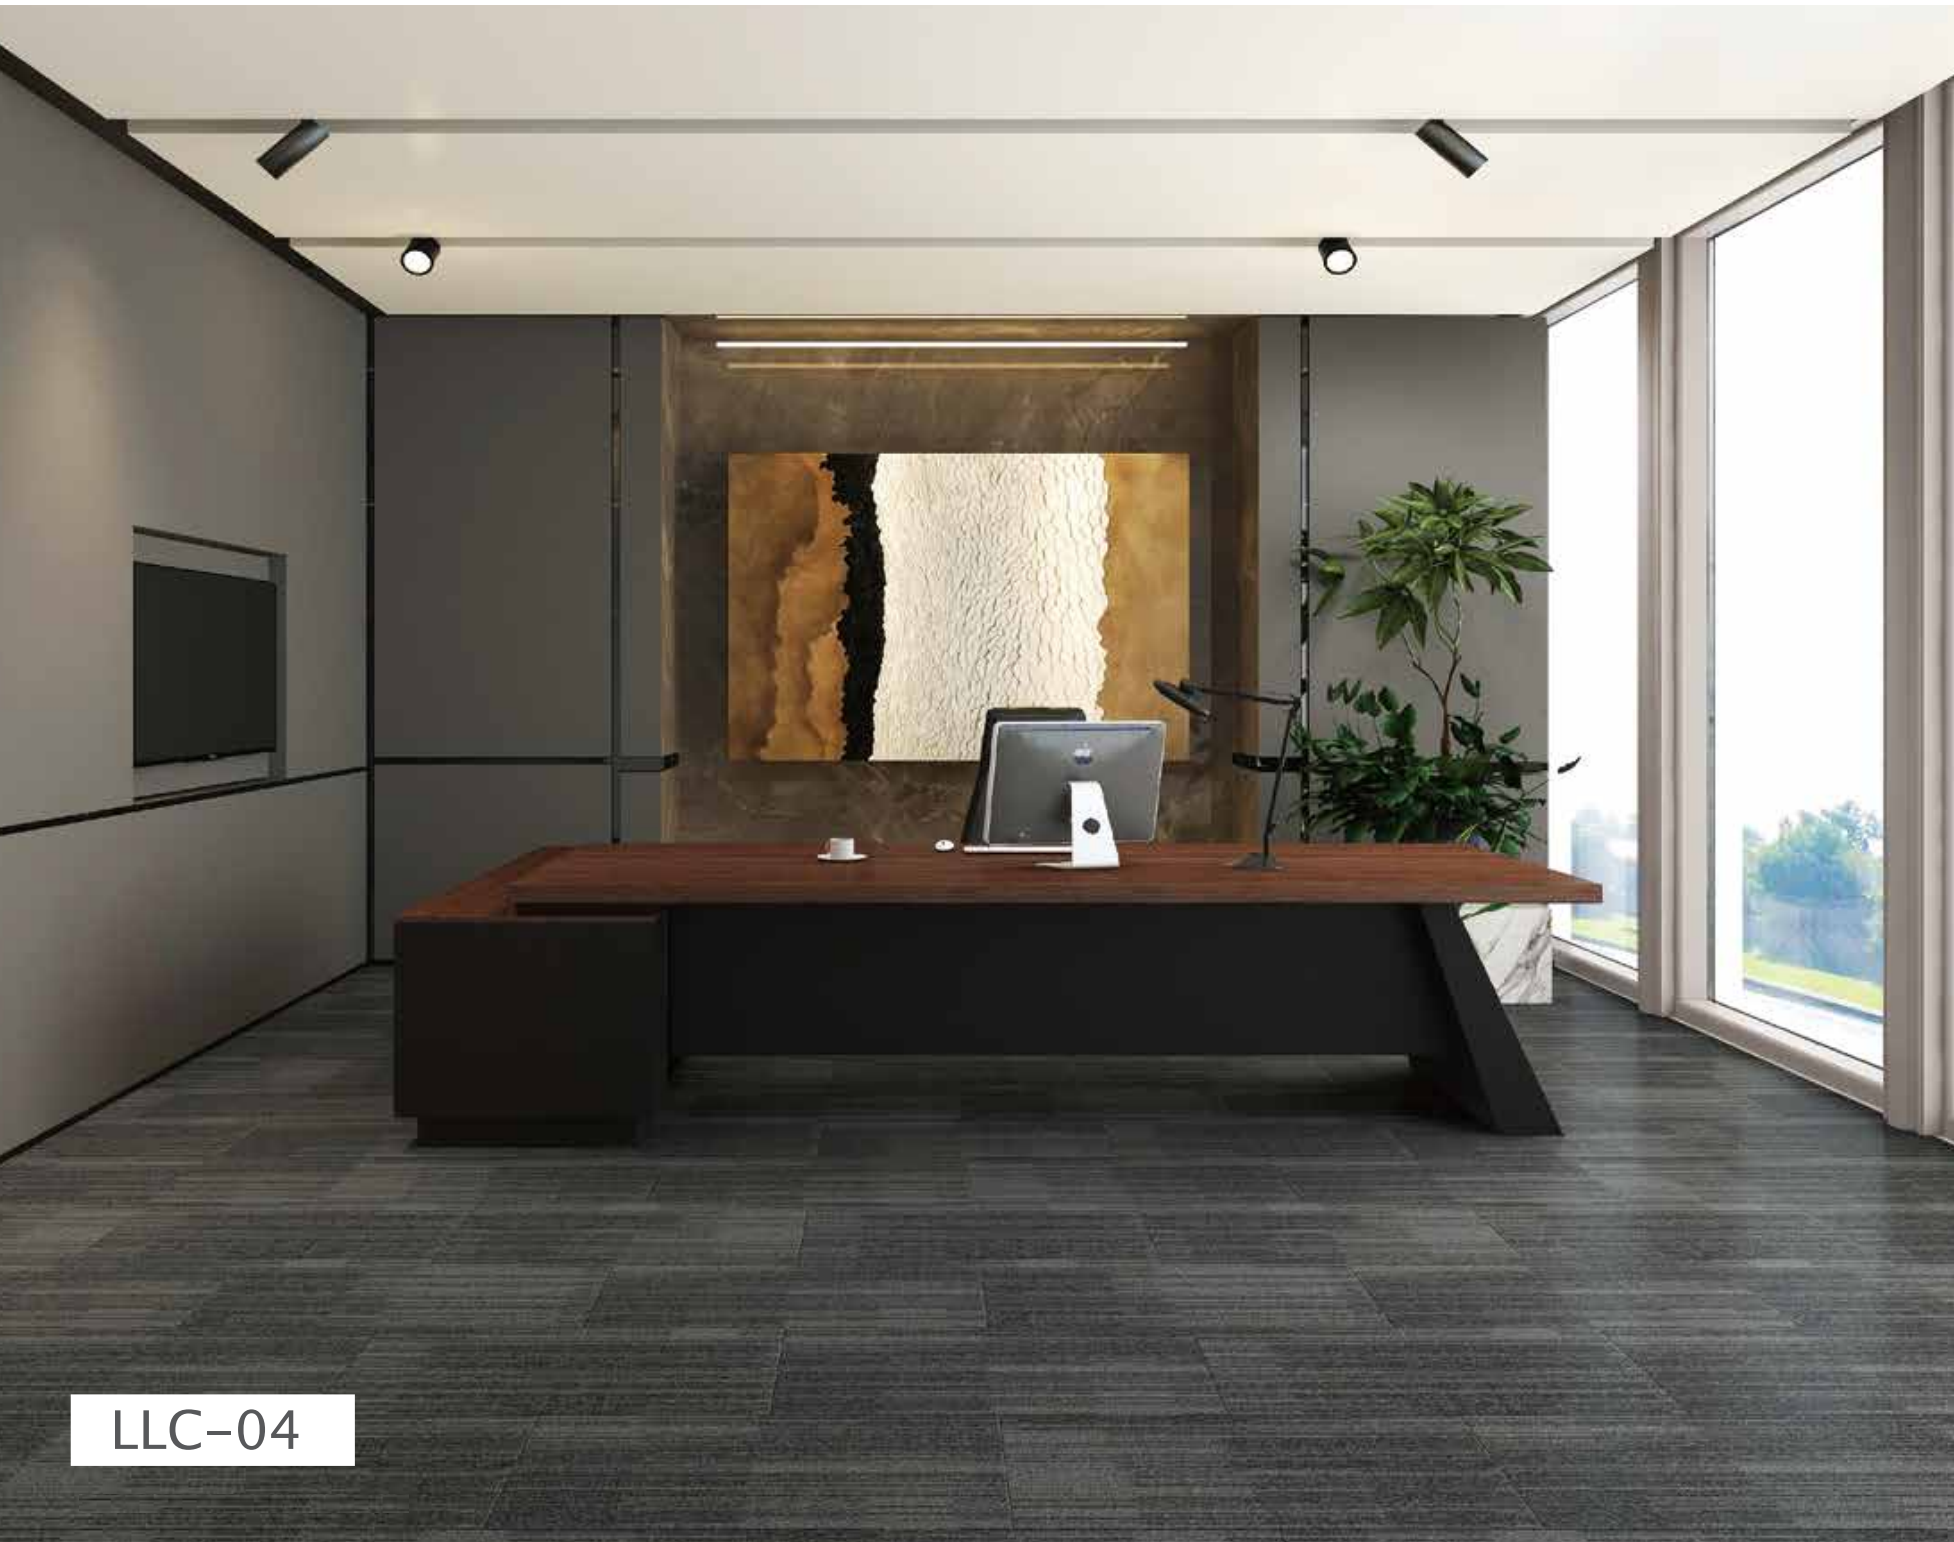

LLC-04


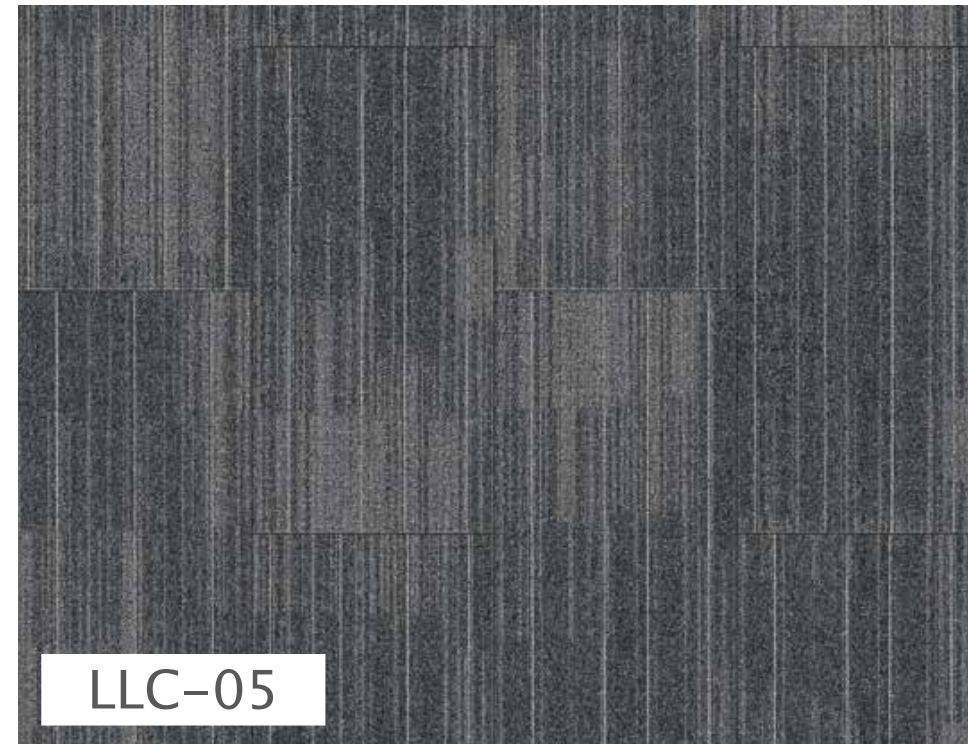


LLC-05

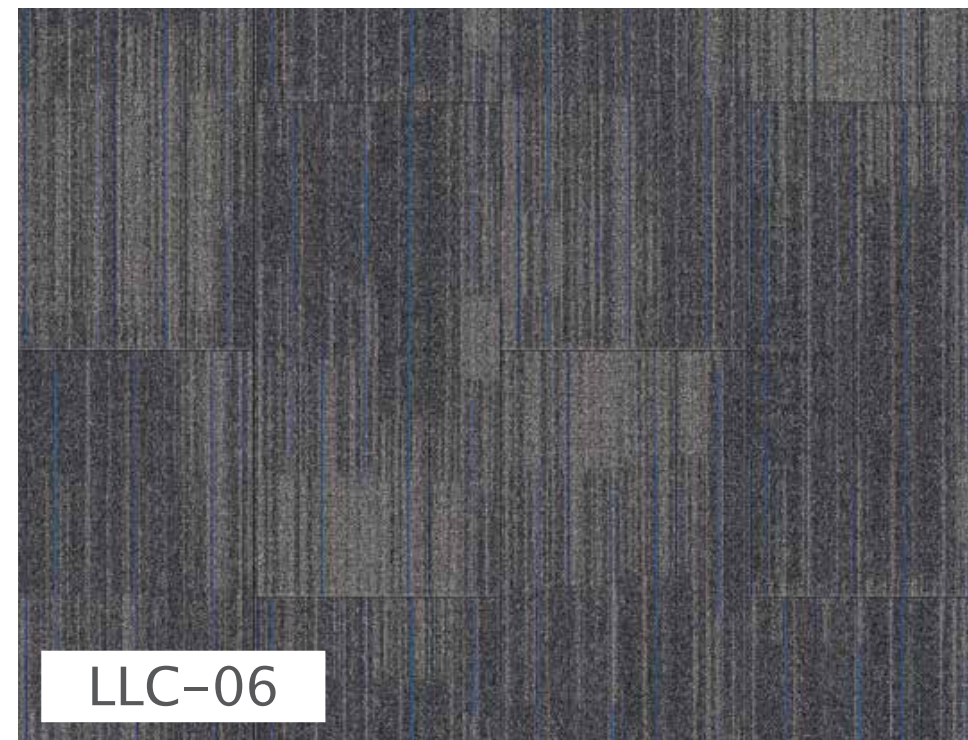

LLC-06

LAMELO

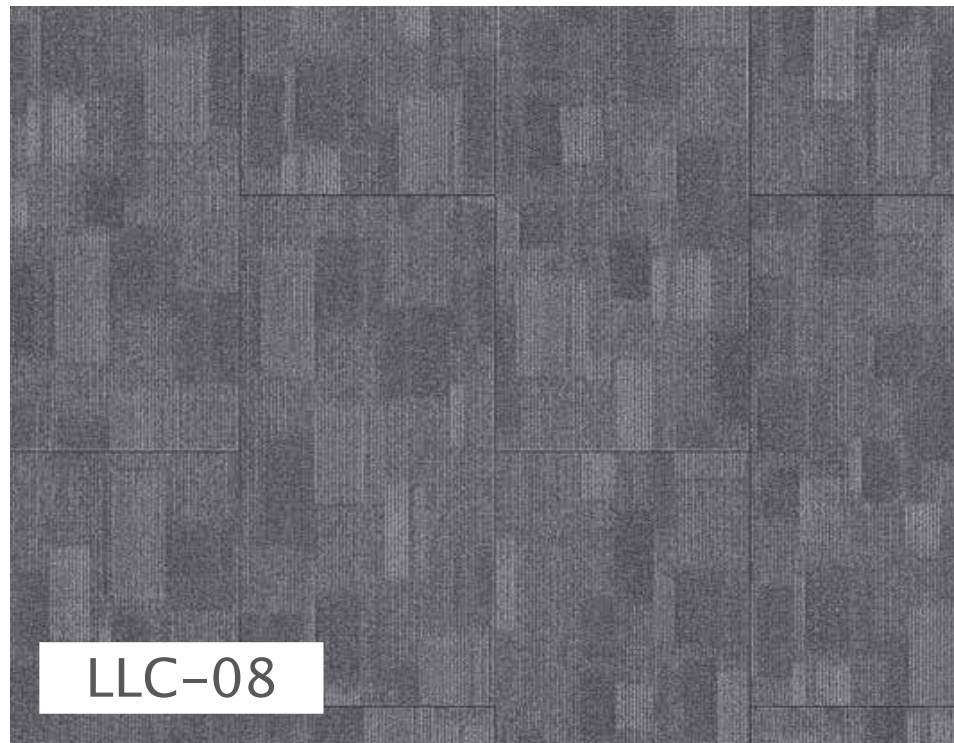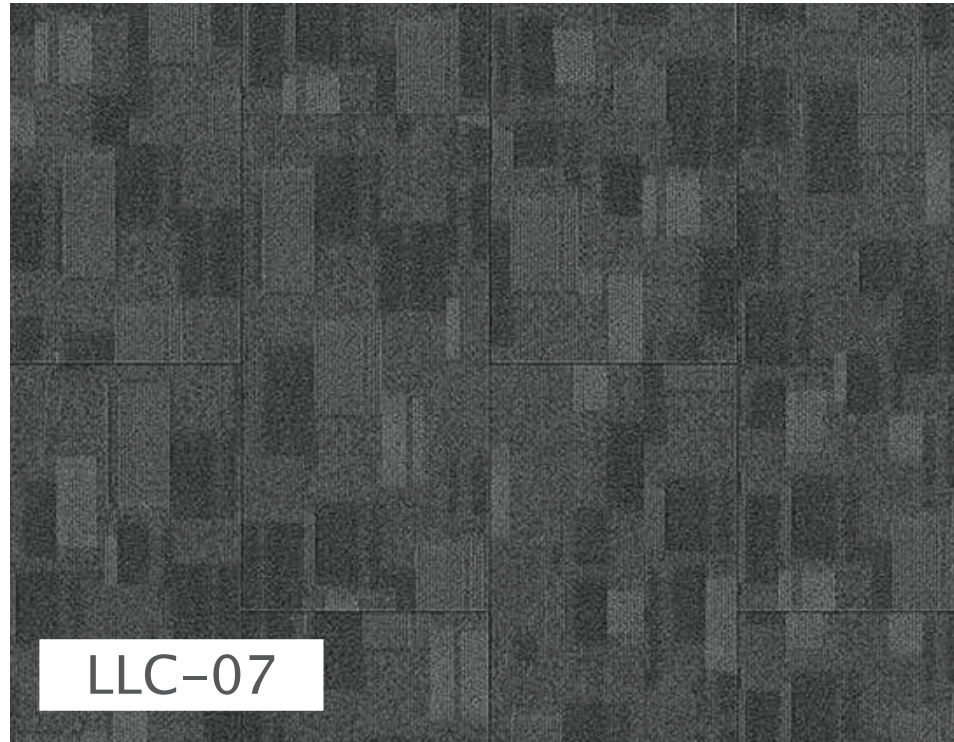

SPC TECHNICAL DATA SHEET

CHARACTERISTICS	STANDARD	GENERALLY USED-SPC
Thickness		3.2mm-8.0mm
Micro-scratch resistance	EN 16094	MSR-B2
Squareness	ISO24342:2018	Max ≤ 0.15mm
Straightness	ISO24342:2018	Max ≤ 0.2mm
Classification	ISO10582	23,31/33, 42/34,43
Dimensional stability	ISO23999:2021	≤ 0.12%
Curling	ISO23999:2021	≤ 1.0mm
Residual indentation	ISO24343-1:2007	≤ 0.10mm
Light stability	ISO105-B02:Method 3	≥ 6
Fire resistance	EN13501-1	Bf1-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN660-2	Group T
Peel resistance	ISO24345:2006	≥ 75N/50mm
Determination of resistance to stains chemical resistance	ISO26987:2008	No change in surface dulling, surface attack, or staining was detected
Castor chair	ISO4918: 2016	After 25000 cycles, test specimens no visible damage
Heavy metal	ASTM F 963-11	Free
Formaldehyde emissiom	EN717-1: 2004	Free
Utilization		Recyclable

PRODUCT SPECIFICATION

SPC CLICK & LVT CLICK & ABA

Plank: (mm) (inch)



110*610mm (4.3**24")



150*1220mm (6**48")



183*1220mm (7**48")



228*1220mm (9**48")



228*1524mm (9**60")



230*1828mm (9**72")

Tile: (mm) (inch)



305*610mm (12**24")